



Task

Plastic ribbons must be treated before printing.

High process speed

High efficiency

High availability

User-friendly

Solution

Plasma-BLASTER with two heads.

Plasma-BLASTER : approx. 100 m/min


Surface energy > 42 mN/m on PP

Standard stations

Controlled by central line control




Compact complete station

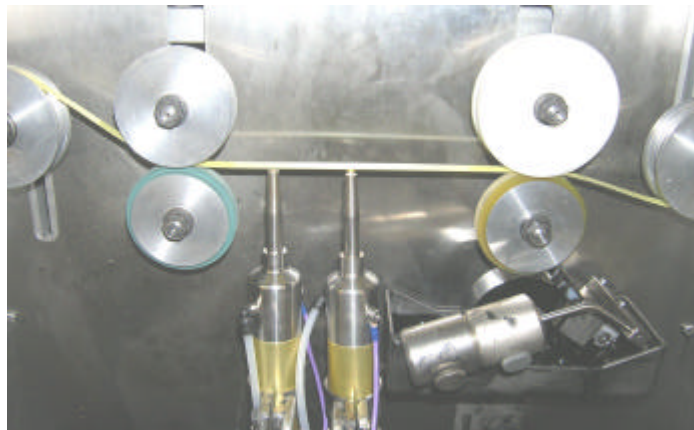

Integrated in RSD printing station

Non treated:
holes prevent reading
with scanner

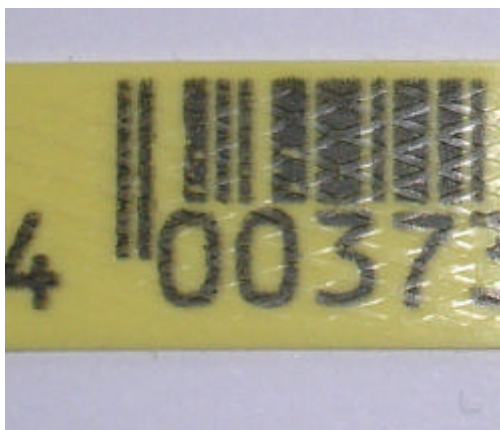

Treated:
Strong colours
High contrast
No holes

